





Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	US(902-928MHZ)
IC type:	NXP Ucode 8
Memory:	EPC 128 bits , USER 0 bits, TID 96 bits
Write Cycles:	100,000 times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	12.0m , US(902-928MHZ),On metal
Read Range : (Handheld Reader)	5.5m , US(902-928MHZ),On metal
Warranty:	1 Year



Physical Specification:

Size:	30.0x30.0mm
Thickness:	3.0mm
Material:	Ceramic
Colour:	Black
Mounting Methods:	Adhesive
Weight:	13.8g

Dimensions:



CER3030U1:

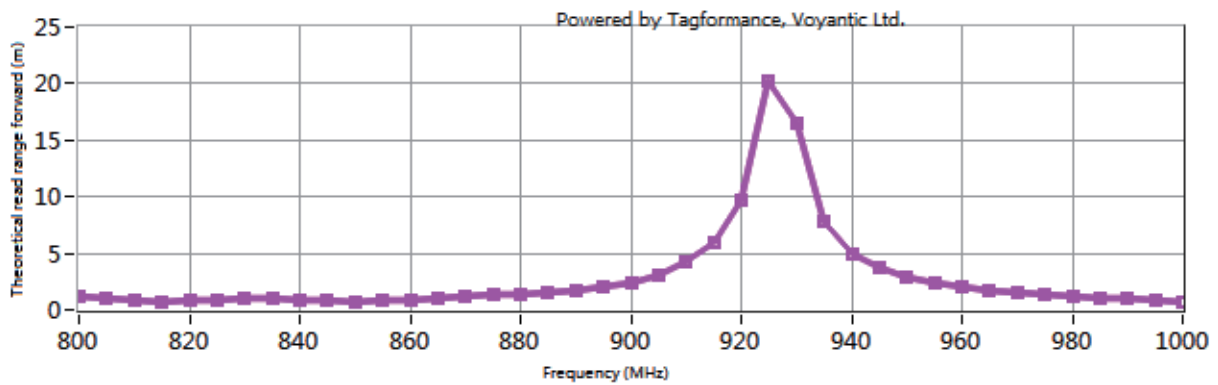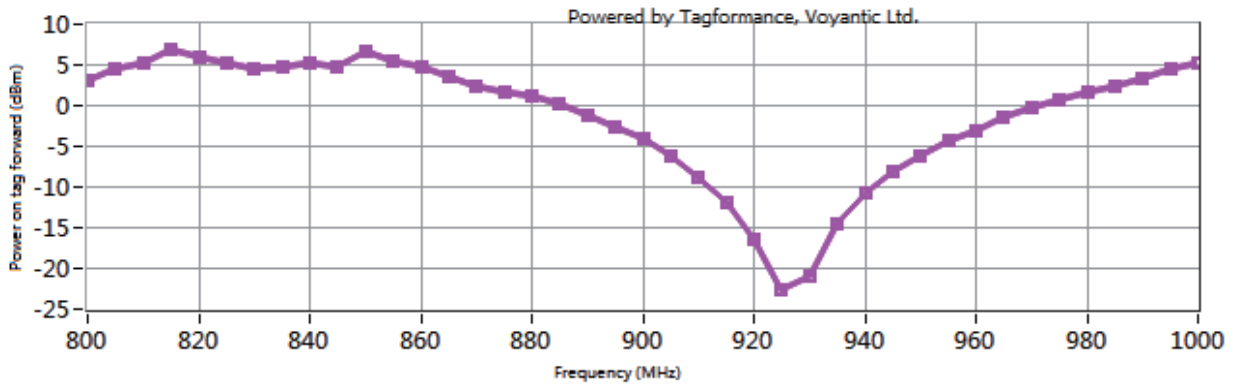

Environmental Specification:

IP Rating:	IP68
Operation Temperature:	-40°C to +150°C
Storage Temperature:	-40°C to +100°C
Certifications:	Reach Approved, RoHS Approved, CE Approved