

UHF Metal Tag Everest Series (Ultrathin):




Functional Specifications:



RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHz
IC type:	Ucode-8
Memory:	EPC 128bits , USER 0bits, TID 96bits
Write Cycles:	100,000times
Functionality:	Read/write
Data Retention:	Up to 50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	Up to 2.3M - (US) 902-928MHz, on metal
Read Range : (Handheld Reader)	Up to 1.6M - (US) 902-928MHz, on metal
Warranty:	1 Year

Physical Specification:

Size:	50x10mm, (Hole: D2mm)
Thickness:	1.0mm without IC bump, 1.6mm with IC bump
Material:	FR4 (PCB)
Colour:	Black (Red, Blue, Green, White)
Mounting Methods:	Adhesive, Screw
Weight:	1.5g

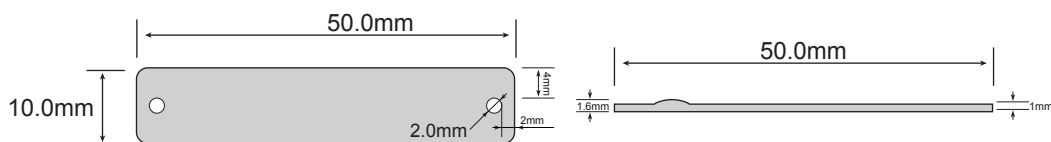

5010(US):

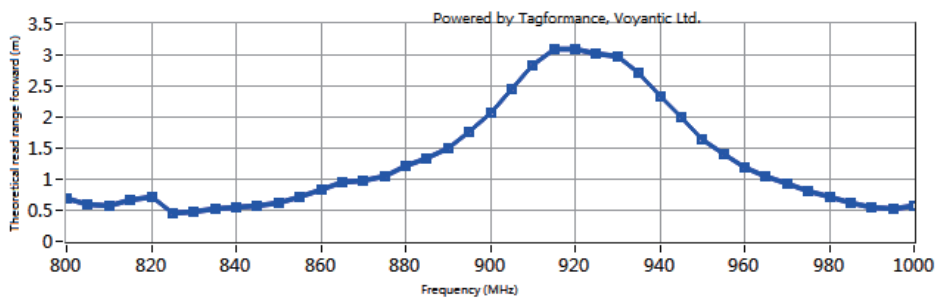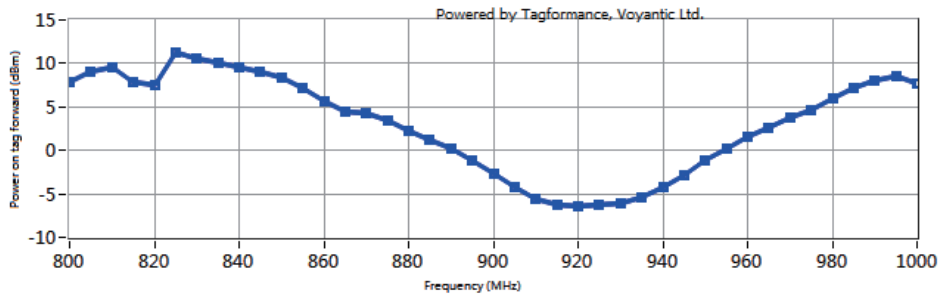

Environmental Specification:

IP Rating:	IP68
Storage Temperature:	-40°C to +150°C
Operation Temperature:	-40°C to +100°C
Certifications:	Reach Approved, RoHS Approved, CE Approved

Order information:

5010U1	(US) 902-928MHz
--------	-----------------